

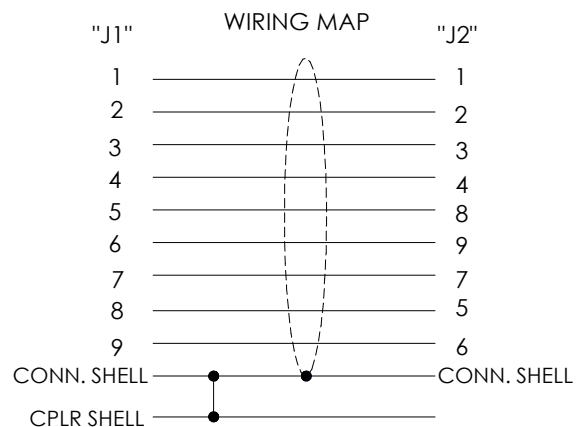
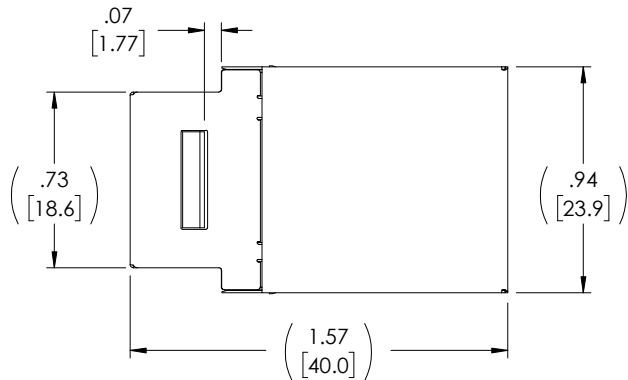



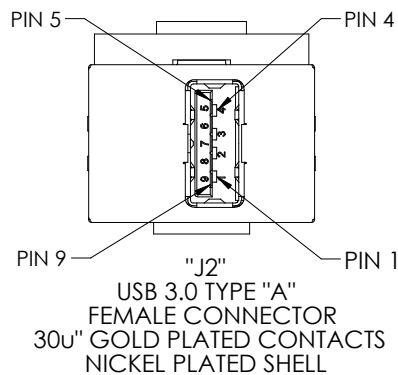

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE  
PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE  
WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/16/2022	GUTTADAURO

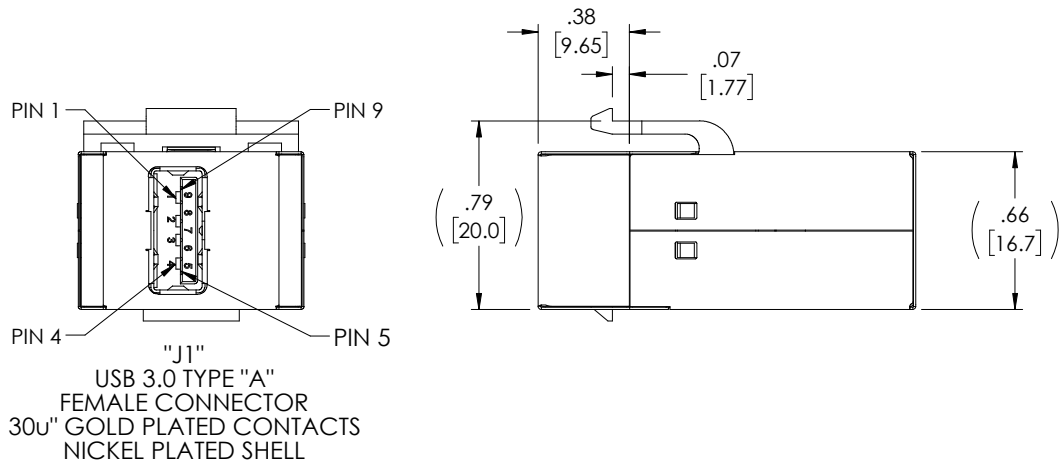

#### NOTES:

1. COUPLER HOUSING: ABS, UL94V-0 RATED, BLACK  
COUPLER SHIELDING: STAINLESS STEEL  
COUPLER PCB: GLASS FIBER EPOXY; FR-4,UL94 V-0
2. RATING:  
CURRENT: 1.8A (P1 and P4 CONTACT); 0.25A(OTHER CONTACT)  
OPERATING TEMPERATURE: -10°C TO +70°C.
3. COUPLER SHALL BE TESTED FOR CONTINUITY.
4. COUPLER SHALL BE INDIVIDUALLY PACKAGED  
IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		 an INFINITOM brand		50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936			
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0  ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [.5]   ANGLES ± 1° .XXX = ± .005 [.13]		DRAWN BY B.ZHANG		01/18/2022		CATEGORY  USB		PRODUCT DESCRIPTION  KEYSTONE USB3.0 CPLR AF-AF SHLD			
		CHECKED BY GUTTA DAURO		01/18/2022							
		APPROVED BY GUTTA DAURO		01/18/2022							
THIRD-ANGLE PROJECTION 		COLOR VARIATIONS MAY OCCUR		SIZE A		CAGE CODE 43321		DWG. NO. U3KEY-AA-S		REV. A	
				SCALE: NONE		CAD FILE: U3KEY-AA-S.SLDDRW				SHEET 1 OF 1	