

6

5

4

3

2

1


REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	UPDATED PER ECO-13914	10/07/2024	HBAKKE	GUTTADAURO

(.44  
[11.3])

PIN 1




P1  
DISPLAYPORT 2.0  
MALE  
CONNECTOR

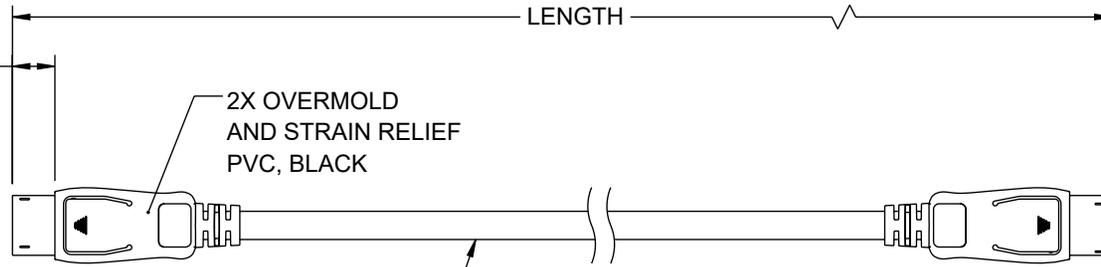

PIN 1

P2  
DISPLAYPORT 2.0  
MALE  
CONNECTOR

WIRE MAP

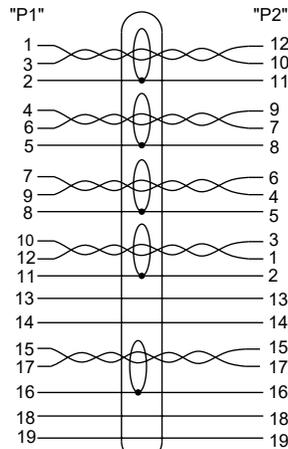

SHELL DRAIN WIRE SHELL

UL20276  
5 TWISTED PAIR, INDIVIDUALLY SHIELDED, 28AWG  
4 COND. 28AWG STRANDED TINNED COPPER  
WITH OVERALL BRAID SHIELD  
JACKET: DISPLAYPORT 2.0, PVC, BLACK

ITEM NUMBER	LENGTH MM [FT]
DP20P-MM-BLK-05M	500.0 +51.0/-0 [1.64]
DP20P-MM-BLK-1M	1000.0 +51.0/-0 [3.28]
DP20P-MM-BLK-2M	2000.0 +102.0/-0 [6.56]
DP20P-MM-BLK-3M	3000.0 +102.0/-0 [9.84]

## NOTES:

- VOLTAGE TEST: DC 300V 10MS  
INSULATION RESISTANCE: 5.0M ohm/min.  
CONDUCTANCE RESISTANCE: 5.0 ohm/max.
- DUST CAPS INSTALLED AT SHIPPING. (NOT SHOWN)
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED..

REGULATORY COMPLIANCE:  
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS


TOLERANCES:  
X = ±.2 [5]      FRACTIONS  
.XX = ±.02 [0.5]      ± 1/32  
.XXX = ±.005 [0.13]      ANGLES ± 1°

CABLE LENGTH TOLERANCES:  
≤12 [305] = +1 [25] / -0  
>12 [305] ≤ 60 [1524] = +2 [51] / -0  
>60 [1524] ≤ 120 [3048] = +4 [102] / -0  
>120 [3048] ≤ 300 [7620] = +6 [152] / -0  
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY  
AND SUBJECT TO CHANGE WITHOUT NOTICE.  
UN-DIMENSIONED/NON-CRITICAL FEATURES  
MAY VARY IN SIZE AND LOCATION  
COLORS MAY VARY

**L-com**  
an INFINIT® brand

Website: www.L-com.com  
Phone: 1.800.341.5266 | 1.978.682.6936



INTERPRET ALL DIMENSIONS AND  
TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION  
DISPLAYPORT 2.0 CABLE ASSEMBLY, M/M, PVC, BLK

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	DFRISIELLO	DP20P-MM-BLK	B

6

5

4

3

2

1