

6

5


4

3

2

1

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	UPDATED PER ECO-13914	10/07/2024	HBAKKE	GUTTADAURO

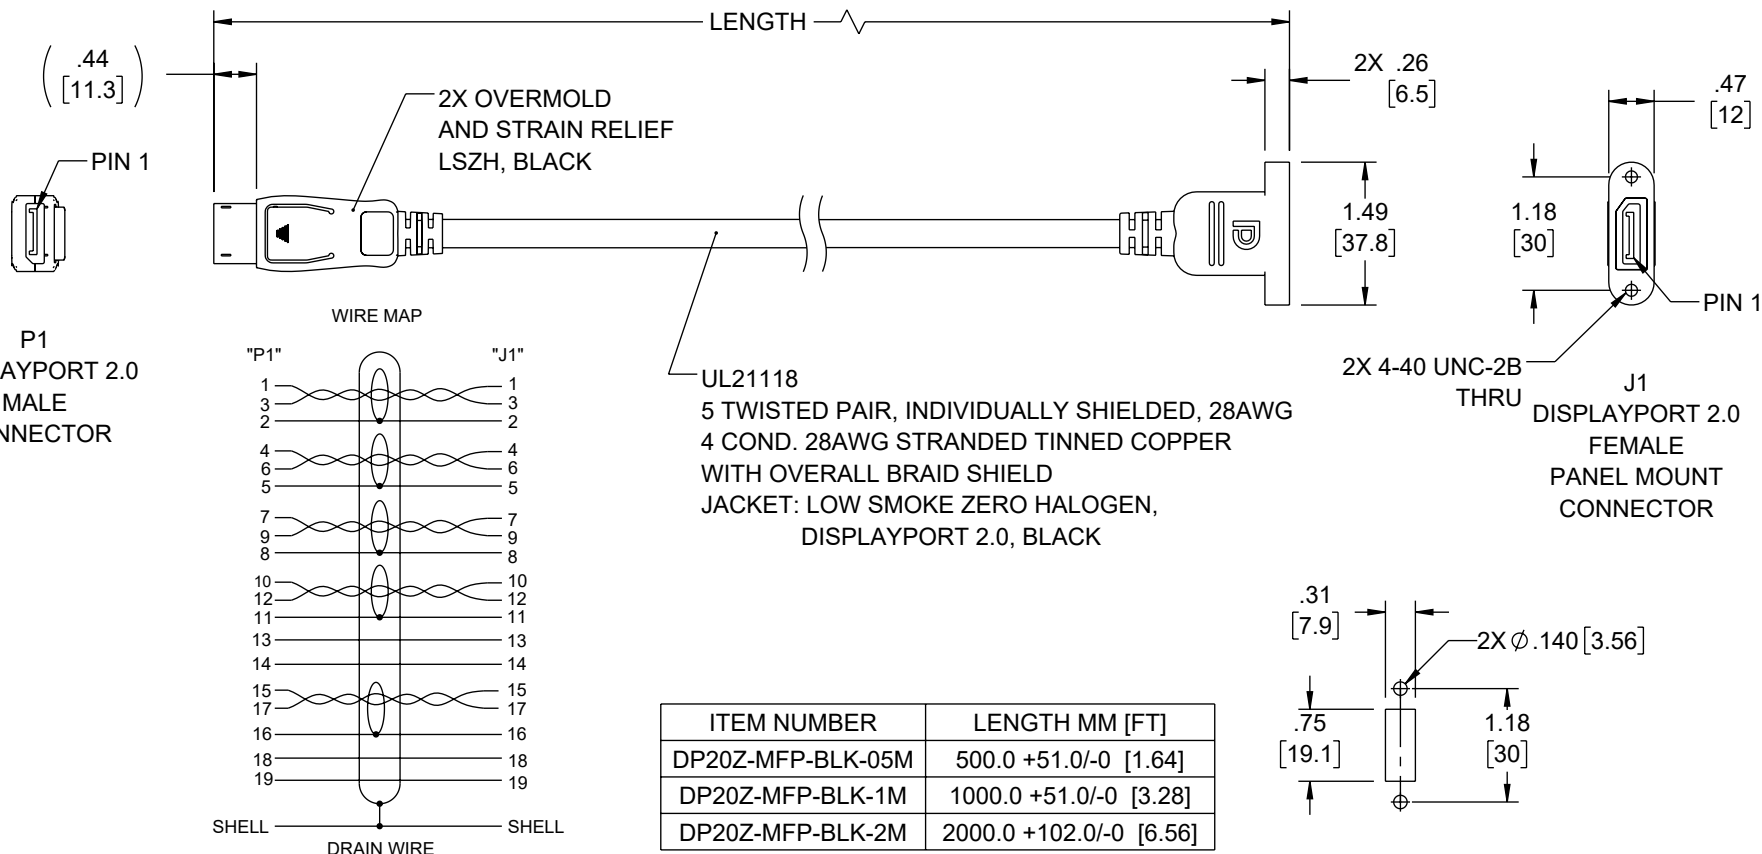

## NOTES:

- VOLTAGE TEST: DC 300V 10MS  
INSULATION RESISTANCE: 5.0M ohm/min.  
CONDUCTANCE RESISTANCE: 5.0 ohm/max.
- 2X #4-40 UNC-2A X .38" LG SCREW INCLUDED. (NOT SHOWN)
- DUST CAPS INSTALLED AT SHIPPING. (NOT SHOWN)
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

## REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS


TOLERANCES:  
X =  $\pm 2$  [5]  
.XX =  $\pm 0.02$  [0.5]  
.XXX =  $\pm 0.005$  [0.13]  
FRACTIONS  
 $\pm 1/32$   
ANGLES  $\pm 1^\circ$

CABLE LENGTH TOLERANCES:  
 $\leq 12$  [305] =  $\pm 1$  [25] / -0  
 $>12$  [305]  $\leq 60$  [1524] =  $\pm 2$  [51] / -0  
 $>60$  [1524]  $\leq 120$  [3048] =  $\pm 4$  [102] / -0  
 $>120$  [3048]  $\leq 300$  [7620] =  $\pm 6$  [152] / -0  
 $>300$  [7620] =  $\pm 5\%$  / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY  
AND SUBJECT TO CHANGE WITHOUT NOTICE.  
UN-DIMENSIONED/NON-CRITICAL FEATURES  
MAY VARY IN SIZE AND LOCATION  
COLORS MAY VARY

**L-com**  
an INFINIT@ brand

Website: [www.L-com.com](http://www.L-com.com)  
Phone: 1.800.341.5266 | 1.978.682.6936



INTERPRET ALL DIMENSIONS AND  
TOLERANCES PER ASME Y14.5

SCALE  
NONE

SHEET  
1 OF 1

DESCRIPTION  
DISPLAYPORT 2.0 CABLE ASSEMBLY, M/F-PM, LSZH, BLK

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	DFRISIELLO	DP20Z-MFP-BLK	B

6

5

4

3

2

1