

615 MHz-960 MHz / 1710 MHz-2700 MHz, 0-3.5 dBi, 4G 5G Omni antenna, Indoor / Outdoor rated, Black - N Type Female Connector



## HG62703U-NF

### Features

- Type N Female Connector
- Black Omni for Indoor or Outdoor
- IP67 Weatherproof for all Environments
- 0 to 3 dBi Gain

### Applications

- 4G & 5G Networks, Public or Private
- 600, 700, 850, 900, 1800, 1900, 2100, 2600 MHz
- IoT, Cellular, Zigbee, Z-Wave, Bluetooth

### Description

The HG62703U-NF 5G Omnidirectional Black Antenna from L-com is a high performance, compact and lightweight antenna which ships same day. This omnidirectional antenna is designed for the 600 MHz to 2700 MHz bands. It features a brass N Type female connector. The N female connector allows it to be mounted to a radio or terminal with a coaxial jumper and provides flexibility of mounting location. L-com's HG62703U-NF is a coaxial sleeve design with an omni-directional pattern. It is ideally suited for 4G, 5G, LTE and other sub 6 GHz Cellular bands in both private and public networks.

The L-com 5G high performance omnidirectional HG62703U-NF is a flexible antenna providing broad coverage and 0 to 3.5 dBi gain. It is suitable as for any network using sub 6 GHz 5G bands including 600, 700, 800, 850, 900, 1800, 1900, 2100, 2300 and 2600 MHz bands. The HG62703U-NF is painted black to blend in with industrial backgrounds.

This 5G Cellular antenna just like our wide selection of superior quality RF parts, ship same day. Contact our knowledgeable and friendly technical support and sales staff for your answers on antennas or other L-com products.

### Configuration

Design	Portable
Band Type	Multi
Radiation Pattern	Omni Directional
Wavelength	1/4
Polarization	Vertical
Connector Type	N Female

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	615		2.7	MHz
Input VSWR			3:1	
Impedance		50		Ohms
Gain		3.5		dBi
Gain	0			dBi

### Specifications by Band

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
615 MHz-960 MHz / 1710 MHz-2700 MHz, 0-3.5 dBi, 4G 5G Omni antenna, Indoor / Outdoor rated, Black - N Type Female Connector HG62703U-NF

615 MHz-960 MHz / 1710 MHz-2700 MHz, 0-3.5 dBi, 4G 5G Omni antenna, Indoor / Outdoor rated, Black - N Type Female Connector



## HG62703U-NF

Description	Band 1	Band 2	Band 3	Band 4	Band 5	Units
Range	615-960	1,710-2,700				MHz
Gain	0	3.5				dBi

### Mechanical Specifications

Radome Material	ABS
Height	7.18 in [182.37 mm]

### Connectors

Description	Connector 1	Connector 2	Connector 3
A	B	C	D
Body Material and Plating	Brass		

### Environmental Specifications

<b>Temperature</b>	
Operating Range	-20 to +65 deg C
Storage Range	-20 to +65 deg C
Environment	IP67

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data


Notes:

615 MHz-960 MHz / 1710 MHz-2700 MHz, 0-3.5 dBi, 4G 5G Omni antenna, Indoor / Outdoor rated, Black - N Type Female Connector from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

615 MHz-960 MHz / 1710 MHz-2700 MHz, 0-3.5 dBi, 4G 5G Omni antenna,  
Indoor / Outdoor rated, Black - N Type Female Connector

L-com CAD Drawing

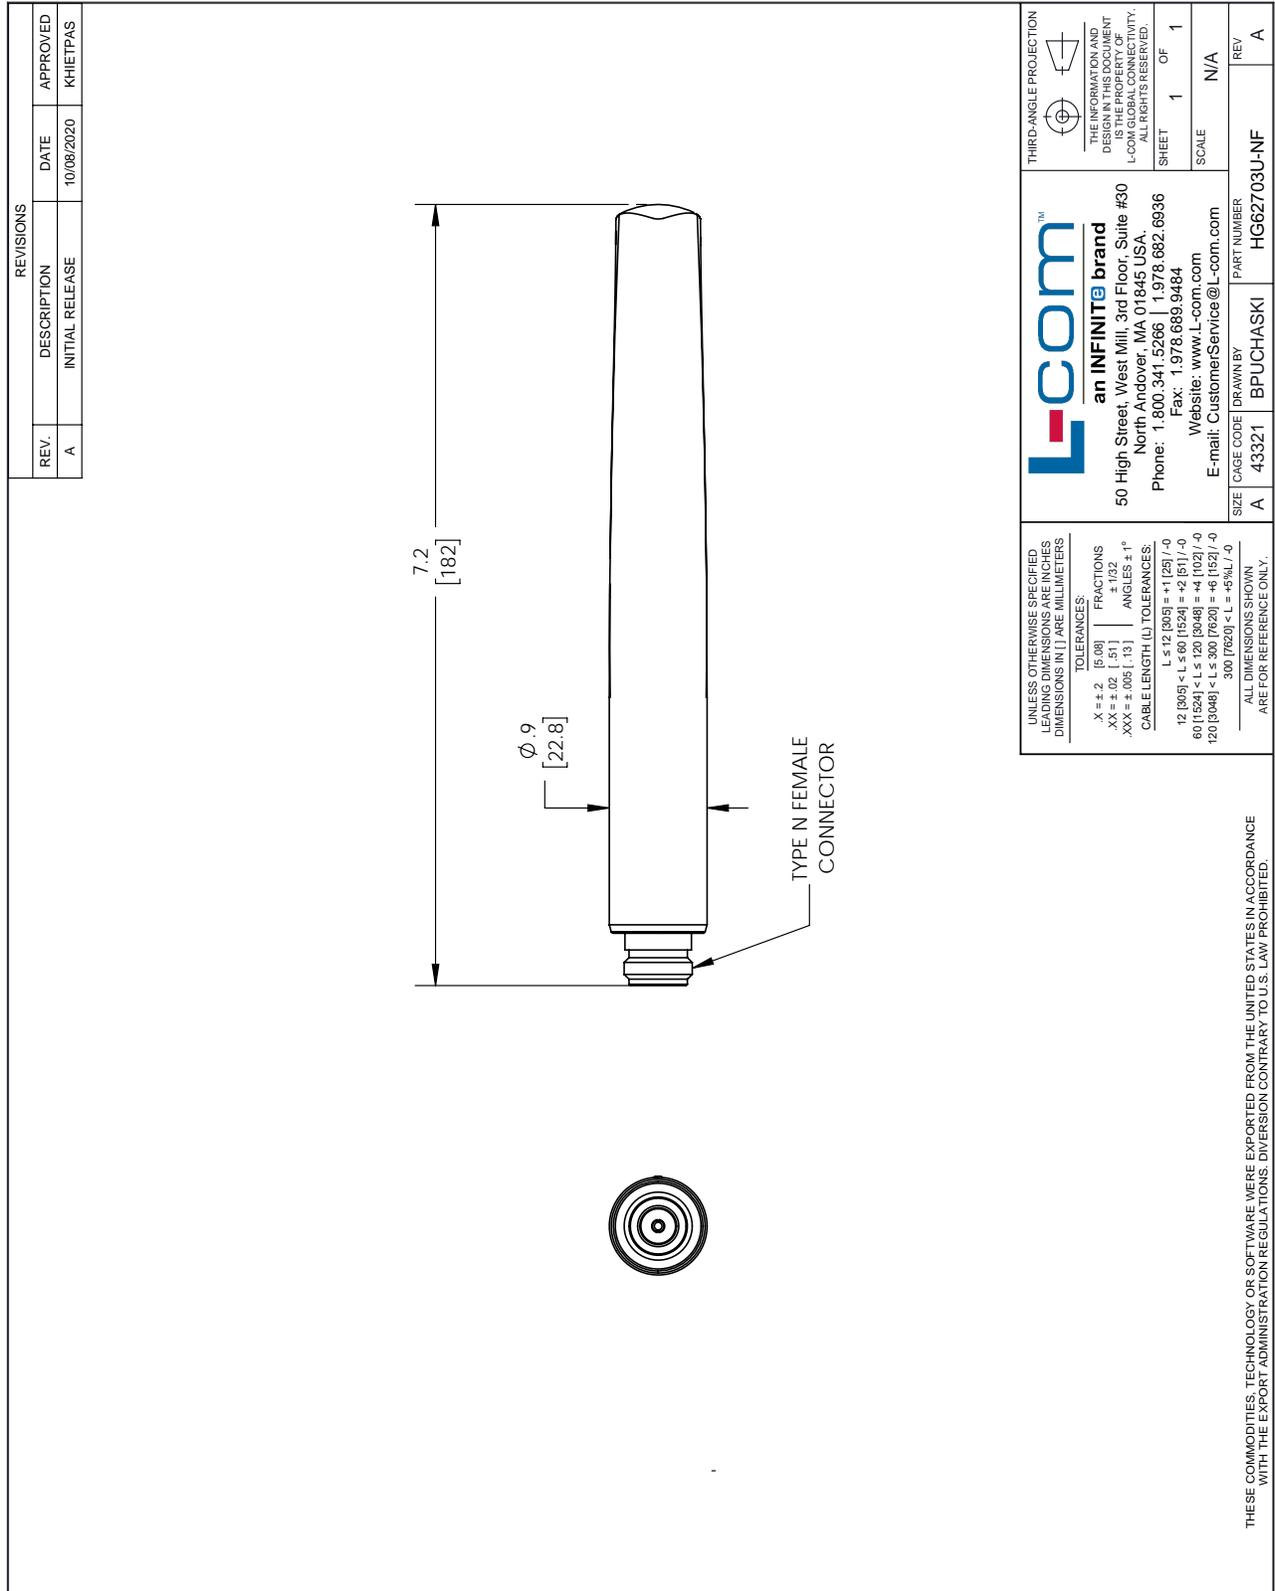

T-Rev.D